




LAUNDRY SOLUTIONS
YOU CAN *DEPEND* ON.

MORE ENERGY-SAVING SOLUTIONS THAN ANY OTHER BRAND

Maytag built the first appliance ever to receive the ENERGY STAR® label. Today we offer more high-efficiency laundry appliances than any other brand — from energy-efficient dryers to highly efficient ENERGY STAR®-qualified washers — to help you save money and build profits.

UPDATED CONTROLS

Includes Maytag® Accu Trac® audit system that uses a PDA to communicate with the microprocessor controls — so you can set up, monitor and audit your equipment in seconds.



FOR YOUR CUSTOMERS:

- Large 30-Pound Capacity Holds More Laundry At Once
- Fast-Drying Axial Airflow System
- Extra-Large Door Opening
- Digital Display Shows Time Remaining In Cycle

FOR YOUR OPERATION:

- Lowest-BTU Dryer On The Market
- Improved Insulation For Greater Efficiency
- Accu Trac® Audit System With Two-Way Data Communications
- Front Access For Easy Service
- Extra-Large Lint Compartment
- Factory-Installed Risers

BUILT-TO-LAST® FEATURES:

- Heavy-Duty Motor
- Permanently Lubricated Bearings
- The Best Warranty In The Business — 5 Years On All Parts


MAYTAG® COMMERCIAL ENERGY ADVANTAGE™ MULTI-LOAD DRYER

MDG31PD



NEW MULTI-LOAD DRYER
**SAVES UP TO
23% IN ENERGY**
AND UTILITY COSTS.*

* Based on comparison between Maytag® MDG31PD and Maytag® MLG32.

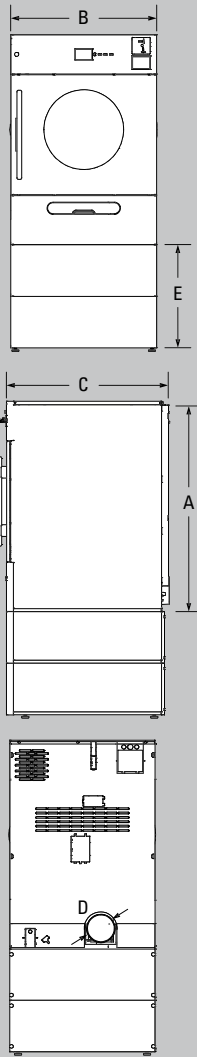

Dimensions will vary according to adjustment of leveling legs; add 1/2" (1.3 cm) minimum.

Maytag® Energy Advantage™ Multi-Load Dryer MICROPROCESSOR COIN-DROP

Energy Advantage™ Multi-Load Dryer	
DRYER SPECIFICATIONS	
MODEL	MDG31PD
CAPACITY	
Lbs. (kg)	30 (13.6)
Cu. ft. (cu. m)	11.04 (.312)
TUMBLER	
Diameter — in. (cm)	30 (76.2)
Depth — in. (cm)	27 (68.5)
MOTOR	
HP (kw) Drive Motor	1/4 (.186)
AIRFLOW	
Cfm (cmm)	360 (10.1)
HEAT INPUT	
BTU/hr. (kcal/hr.)	55,000 (13,860)
GAS INLET	
In. M.N.P.T.	3/8
VOLTAGE/BREAKER/FUSE REQUIREMENTS	
Voltage	120
Amps	10.3
COLOR	
White	•
Stainless Steel	•
APPROXIMATE WEIGHT	
Crated — lbs. (kg)	446 (202.3)
Uncrated — lbs. (kg)	425 (192.8)
DIMENSIONS	
A) Height not including legs — in. (cm)	44 ²⁵ / ₃₂ (113.7)
B) Width — in. (cm)	31 ¹ / ₈ (79.1)
C) Depth not including door handle — in. (cm)	34 ⁵ / ₈ (87.6)
D) Exhaust diameter — in. (cm)	6 (15.2)*
E) Riser Height — in. (cm)	22 (55.88)
Door opening — in. (cm)	19 ³ / ₈ (49.2)
* Requires 8" (20.3 cm) material if venting horizontally; 10" (25.4 cm) if venting vertically.	
See specific instructions for proper installation.	
Because of continuous product improvement, Maytag reserves the right to change specifications without notice.	



NEW YORK CITY
M.E.A.



5 YEARS — ALL PARTS

For a period from the date of original purchase through the time listed above, the designated parts that fail in normal commercial use will be repaired or replaced free of charge for the part itself, with the owner paying all other costs, including labor, transportation and customs duty. Chemical damage is excluded from all warranty coverage. See complete warranty for details.

