



# MAYTAG® COMMERCIAL SINGLE-LOAD STACK DRYER

LAUNDRY SOLUTIONS  
YOU CAN *DEPEND* ON.

## TWO POCKETS IN THE SPACE OF ONE

You can potentially double your dryer income and help eliminate waiting with two dryer pockets in the same floor space as one single-load dryer. Laundry dries quickly and efficiently, thanks to a choice of cycles and powerful 220-cfm diagonal airflow.



## FOR YOUR CUSTOMERS:

- Display Shows Coin Countdown And Time Remaining In Cycle
- Super Capacity Handles Big And Bulky Loads
- Extra-Large Doors And Drum Openings
- Simple One-Touch Operation
- Canadian Model Features Dual Coin-Drop Operation

## FOR YOUR OPERATION:

- Two Dryer Pockets In The Same Floor Space As One
- Extra-Large Security Coin Vault
- Computer Trac® Controls Let You Adjust Prices By Day And Time
- Optional Audit System With Two-Way Data Communication

## BUILT-TO-LAST™ FEATURES:


- Cushioned Drum Suspension With Permanently Lubricated Bearings
- Tri-Coat™ Cabinet Protection
- The Best Warranty In The Business

# MLE/MLG23PDH




# Maytag® Single-Load Stack Dryer

## MICROPROCESSOR COIN-DROP

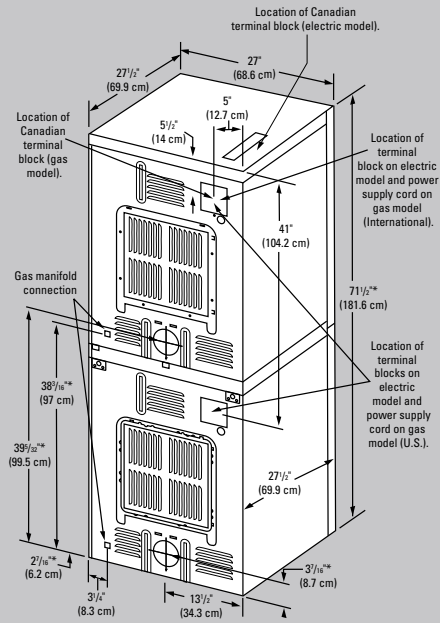

\*Dimensions will vary according to adjustment of leveling legs; add 1/2" (1.3 cm) minimum.

### MAXIMUM EXHAUST DUCT LENGTH PER NUMBER OF TURNS



4"-diameter rigid metal duct		
0	65 ft. (19.8 m)	59 ft. (18 m)
1	54 ft. (16.5 m)	48 ft. (14.6 m)
2	44 ft. (13.4 m)	38 ft. (11.6 m)
3	36 ft. (11 m)	30 ft. (9.1 m)
4	28 ft. (8.5 m)	22 ft. (6.7 m)

4"-diameter flexible stiff-walled metal duct		
0	36 ft. (11 m)	28 ft. (8.5 m)
1	32 ft. (9.8 m)	24 ft. (7.3 m)
2	28 ft. (8.5 m)	20 ft. (6.1 m)
3	25 ft. (7.6 m)	17 ft. (5.2 m)
4	23 ft. (7 m)	15 ft. (4.6 m)



## 5 YEARS — ALL PARTS

For a period from the date of original purchase through the time listed above, the designated parts that fail in normal commercial use will be repaired or replaced free of charge for the part itself, with the owner paying all other costs, including labor, transportation and customs duty. Chemical damage is excluded from all warranty coverage. See complete warranty for details.



Single-Load Stack Dryer/Dryer	
DRYER AND STACKED UNIT SPECIFICATIONS	
<b>MODEL</b>	<b>MLE/MLG23PDH</b>
<b>MOTOR</b>	
Single-phase, thermoprotected against overload, auto-reset	•
HP (kw)	¼ (.19)
Tumble speed — rpm	50 ± 1.5
<b>ELECTRICAL REQUIREMENTS</b>	
Volts (Hz)	
Electric model	240 (60)
Gas model	120 (60)
Export models — volts (Hz)	220 – 240 (50)
Breaker/fuse requirements — amps	
Electric model (each drying chamber)	30
Electric model — export (one terminal per block per stack)	40
Gas model (each drying chamber)	15
Gas model — export (one power cord per stack)	10
Approximate overall wattage draw per drying chamber	5,900
Approximate overall wattage draw per drying chamber — export	4,800
<b>CAPACITY</b> — cu. ft. (cu. m)	6 (.17)
<b>AIRFLOW</b>	
Domestic models — cfm (cmm) per pocket	220 (6.2)
Export models — cfm (cmm) per pocket	180 (5)
<b>EXHAUST DUCT DIAMETER</b> — in. (cm)	2 outlets, 4 (10.2)*
<b>NICHROME HELIX COIL HEATING ELEMENT</b> (MLE models)	•
<b>SINGLE-PORT BURNER WITH AUTOMATIC ELECTRIC IGNITION</b> (MLG models)	•
<b>GAS RATING</b> (MLG models)	
Domestic models — BTU/hr. (kcal/hr.) per drying chamber	24,000 (6,048)
Export models — BTU/hr. (kcal/hr.) per drying chamber	20,000 (5,040)
<b>GAS INLET</b> — in. (cm)	2 inlets, ½ (1.3)
<b>ADJUSTABLE LEVELING LEGS</b>	
	•
<b>COLOR</b>	
White	•
<b>APPROXIMATE WEIGHT</b>	
Crated — lbs. (kg)	278 (125)
Uncrated — lbs. (kg)	254 (114)
<b>DIMENSIONS</b>	
Height — in. (cm)	71½ (181.6) <sup>†</sup>
Width — in. (cm)	27 (68.6)
Depth — in. (cm)	27½ (69.9) <sup>††</sup>
* Use a minimum of 4" (10.2 cm) -diameter rigid aluminum or galvanized-steel duct. Never use plastic, nonmetal or combustible duct.	
<sup>†</sup> Dimensions will vary according to adjustment of leveling legs; add ½" to 2" (1.3 cm to 5.1 cm) min.	
<sup>††</sup> Additional depth with venting will take from 1¼" to 7" (2.9 cm to 17.9 cm) of depth depending on the vent method used.	
Because of continuous product improvement, Maytag reserves the right to change specifications without notice.	

