


# MULTI-LOAD WASHERS U.S./CANADA

MWS55PNATS ■ SOFT MOUNT ■ NON VEND  
(OPL CONTROL)



The expanded line of Maytag Commercial Washers up to a capacity of 85 pounds provides operators what they've asked for: reliable, durable equipment built to satisfy market demands.

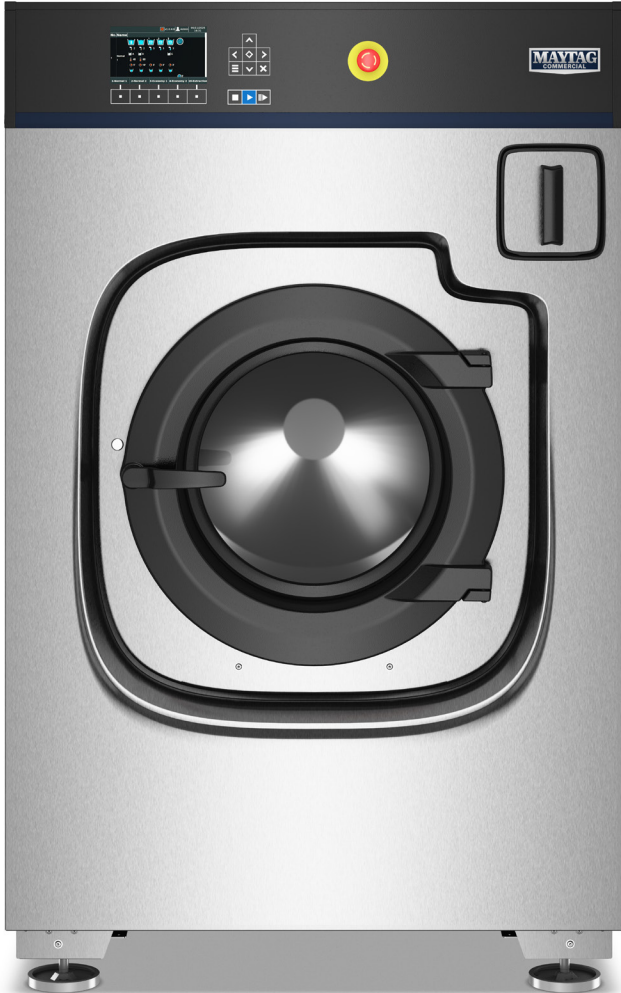

### 7-IN. LCD SCREEN

This large display allows users to easily view settings, cycles, and real-time updates.



### 360G EXTRACTION

Shortens drying times and removes excess moisture with powerful 360G-force extraction.



### CERAMIC-COATED SHAFT SLEEVE

Specially designed to help reduce friction within the drive train to support long-term durability.



### REMOVABLE DISPENSER TRAYS

Simplified maintenance. Each tray can be removed without detaching the assembly.

## STANDARD FEATURES

- Large door opens to 180°
- Stainless steel drum, tub, and front panel
- Multilingual controls
- USB programmable
- Choice of liquid or powder detergent in 5-compartment front soap dispenser
- Equipped for automatic soap dosing
- Large 3" drain valve



See [maytagcommerciallaundry.com](http://maytagcommerciallaundry.com) for warranty details.

VISIT [MAYTAGCOMMERCIALLAUNDRY.COM](http://MAYTAGCOMMERCIALLAUNDRY.COM) FOR MORE INFORMATION.


®/™ © 2026 Maytag. All rights reserved.  
MY250497 02/26

# MULTI-LOAD WASHERS U.S./CANADA


MWS55PNATS ■ SOFT MOUNT ■ NON VEND  
(OPL CONTROL)




## FRONT VIEW (Appearance may vary.)

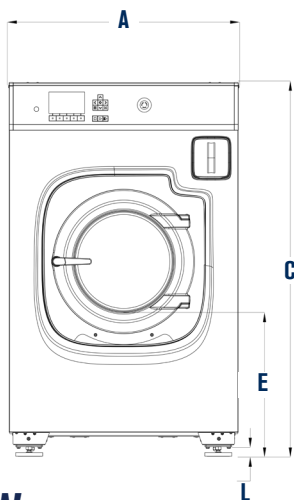

## SIDE VIEW

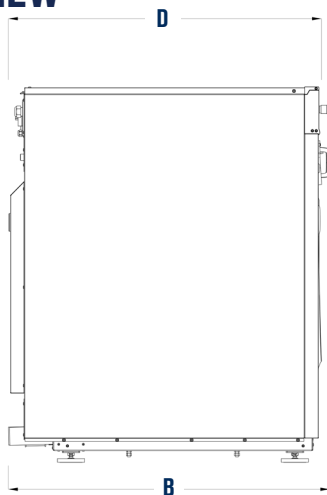

## BACK VIEW

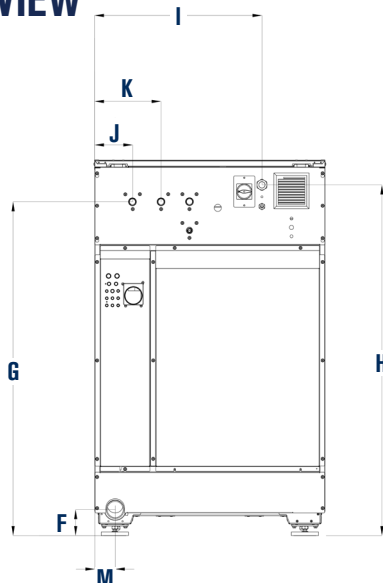

## SPECIFICATIONS

MODEL	MWS55PNATS
Rated Capacity — lb (kg)	55 (25)
Extraction (G-Force)	360
Drum Diameter — in (mm)	27.6 (701)
Drum Depth — in (mm)	25 (630)
Drum Volume — cu ft (L)	8.5 (241)
Electrical Requirements — Volts/Hz/Phase	208-240/50-60/1
Circuit Breaker	25 A
Motor HP (kW)	5.4 (4.0)
DIMENSIONS	
Crated Width — in (mm)	40.2 (1,021)
Crated Height — in (mm)	64.5 (1,640)
Crated Depth — in (mm)	53.1 (1,349)
Drawing Dimensions	
Uncrated Width — in (mm)	<b>A.</b> 38.4 (975)
Drain to Door Handle — in (mm)	<b>B.</b> 50 (270)
Uncrated Height — in (mm)	<b>C.</b> 61.6 (1,565)
Uncrated Depth — in (mm)	<b>D.</b> 50 (1,270)
Door Opening to Floor — in (mm)	<b>E.</b> 23.7 (602)
Center of Drain to Floor — in (mm)	<b>F.</b> 4.3 (109)
Center of Water Connections to Floor — in (mm)	<b>G.</b> 54.8 (1,392)
Electrical Connection to Floor — in (mm)	<b>H.</b> 57.6 (1,462)
Electrical Connection to Left Side — in (mm)	<b>I.</b> 27.9 (709)
Cold Water Connection to Left Side — in (mm)	<b>J.</b> 6.4 (162)
Hot Water Connection to Left Side — in (mm)	<b>K.</b> 11.1 (282)
Leg Height — in (mm)	<b>L.</b> 1.6 (41)
Center of Drain to Side — in (mm)	<b>M.</b> 3.5 (88)
APPROXIMATE WEIGHT	
Uncrated — lb (kg)	1,562 (708.5)
Crated — lb (kg)	1,605 (728)
SPEED	
Wash RPM (G)	37 (0.53)
Spin RPM (G)	961 (360)
WATER SPECIFICATIONS	
Operating Pressure	15-87 PSI
Inlets Size — in (mm)/Connections	3/4 (19)/2
Approximate Water Consumption TOTAL — Gal (L)/cycle	43.3 (163.9)
Drain Valve (Outer Diameter) — in (mm)	3 (76.2)

Dimensions are for planning purposes only. See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.

