

MULTI-LOAD WASHERS U.S./CANADA

MWS45PNATS ▪ SOFT MOUNT ▪ NON VEND
(OPL CONTROL)



The expanded line of Maytag Commercial Washers up to a capacity of 85 pounds provides operators what they've asked for: reliable, durable equipment built to satisfy market demands.



7-IN. LCD SCREEN

This large display allows users to easily view settings, cycles, and real-time updates.



360G EXTRACTION

Shortens drying times and removes excess moisture with powerful 360G-force extraction.



CERAMIC-COATED SHAFT SLEEVE

Specially designed to help reduce friction within the drive train to support long-term durability.



REMOVABLE DISPENSER TRAYS

Simplified maintenance. Each tray can be removed without detaching the assembly.

STANDARD FEATURES

- Large door opens to 180°
- Stainless steel drum, tub, and front panel
- Multilingual controls
- USB programmable
- Choice of liquid or powder detergent in 5-compartment front soap dispenser
- Equipped for automatic soap dosing
- Large 3" drain valve



See maytagcommerciallaundry.com for warranty details.

VISIT MAYTAGCOMMERCIALLAUNDRY.COM FOR MORE INFORMATION.


®/™ © 2026 Maytag. All rights reserved.
MY250496 02/26

MULTI-LOAD WASHERS U.S./CANADA


MWS45PNATS ■ SOFT MOUNT ■ NON VEND
(OPL CONTROL)




FRONT VIEW (Appearance may vary.)

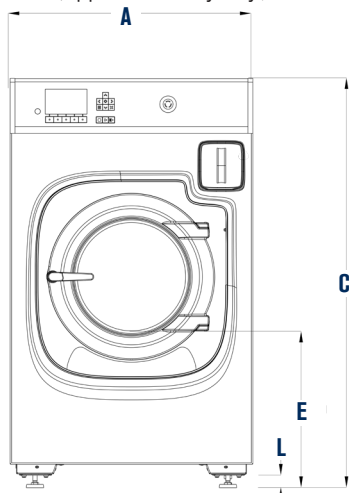

SIDE VIEW

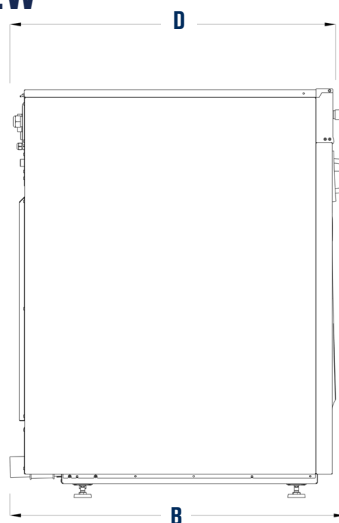

BACK VIEW

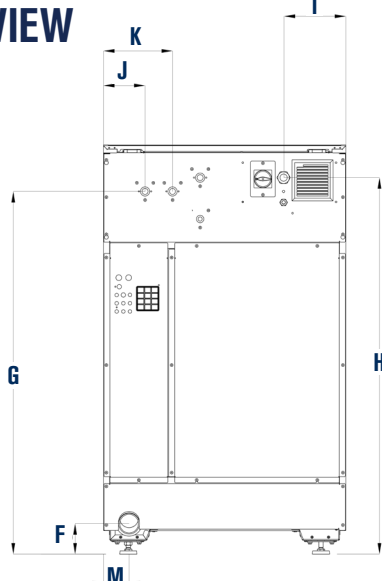

SPECIFICATIONS

MODEL	MWS45PNATS
Rated Capacity — lb (kg)	45 (20.4)
Extraction (G-Force)	360
Drum Diameter — in (mm)	24.8 (630)
Drum Depth — in (mm)	23 (579)
Drum Volume — cu ft (L)	6.4 (181)
Electrical Requirements — Volts/Hz/Phase	208-240/50-60/1
Circuit Breaker	25 A
Motor HP (kW)	4.0 (3.0)
DIMENSIONS	
Crated Width — in (mm)	36.6 (930)
Crated Height — in (mm)	61.8 (1,570)
Crated Depth — in (mm)	51.2 (1,300)
Drawing Dimensions	
Uncrated Width — in (mm)	A. 34.6 (879)
Drain to Door Handle — in (mm)	B. 47.8 (1,214)
Uncrated Height — in (mm)	C. 59.1 (1,501)
Uncrated Depth — in (mm)	D. 48.3 (1,227)
Door Opening to Floor — in (mm)	E. 22.3 (566)
Center of Drain to Floor — in (mm)	F. 4.4 (111)
Center of Water Connections to Floor — in (mm)	G. 51.8 (1,315)
Electrical Connection to Floor — in (mm)	H. 53.8 (1,366)
Electrical Connection to Right Side — in (mm)	I. 8.9 (225)
Cold Water Connection to Left Side — in (mm)	J. 5.9 (150)
Hot Water Connection to Left Side — in (mm)	K. 9.8 (250)
Leg Height — in (mm)	L. 1.8 (45)
Center of Drain to Side — in (mm)	M. 3.7 (93)
APPROXIMATE WEIGHT	
Uncrated — lb (kg)	1,047 (474.9)
Crated — lb (kg)	1,090 (494.4)
SPEED	
Wash RPM (G)	43 (0.65)
Spin RPM (G)	1,012 (360)
WATER SPECIFICATIONS	
Operating Pressure	15-87 PSI
Inlets Size — in (mm)/Connections	3/4 (19)/2
Approximate Water Consumption TOTAL — Gal (L)/cycle	37.2 (141)
Drain Valve (Outer Diameter) — in (mm)	3 (76.2)

Dimensions are for planning purposes only. See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.

