

MULTI-LOAD WASHERS U.S./CANADA

MWS85PNAVS ▪ SOFT MOUNT ▪ NON VEND
(OPL CONTROL)



The expanded line of Maytag Commercial Washers up to a capacity of 85 pounds provides operators what they've asked for: reliable, durable equipment built to satisfy market demands.



7-IN. LCD SCREEN

This large display allows users to easily view settings, cycles, and real-time updates.



360G EXTRACTION

Shortens drying times and removes excess moisture with powerful 360G-force extraction.



CERAMIC-COATED SHAFT SLEEVE

Specially designed to help reduce friction within the drive train to support long-term durability.



REMOVABLE DISPENSER TRAYS

Simplified maintenance. Each tray can be removed without detaching the assembly.

STANDARD FEATURES

- Large door opens to 180°
- Stainless steel drum, tub, and front panel
- Multilingual controls
- USB programmable
- Choice of liquid or powder detergent in 6-compartment front soap dispenser
- Equipped for automatic soap dosing
- Large 3" drain valve



See maytagcommerciallaundry.com for warranty details.

VISIT MAYTAGCOMMERCIALLAUNDRY.COM FOR MORE INFORMATION.


®/™ © 2026 Maytag. All rights reserved.
MY250499 02/26

MULTI-LOAD WASHERS U.S./CANADA


MWS85PNAVS ■ SOFT MOUNT ■ NON VEND (OPL CONTROL)




FRONT VIEW (Appearance may vary.)

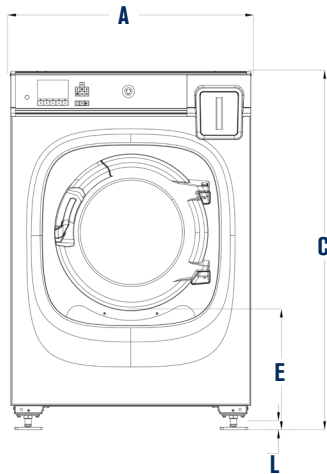

SIDE VIEW

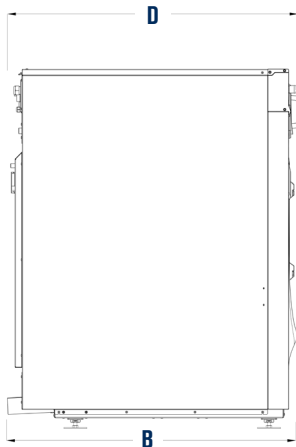

BACK VIEW

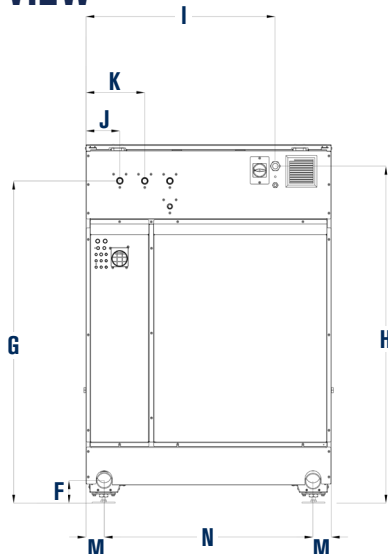

SPECIFICATIONS

| MODEL | MWS85PNAVS |
|--|-------------------|
| Rated Capacity — lb (kg) | 85 (38.6) |
| Extraction (G-Force) | 360 |
| Drum Diameter — in (mm) | 35.4 (899) |
| Drum Depth — in (mm) | 23 (574) |
| Drum Volume — cu ft (L) | 12.9 (365) |
| Electrical Requirements — Volts/Hz/Phase | 208-240/50-60/3PH |
| Circuit Breaker | 20 A |
| Motor HP (kW) | 7.4 (6.0) |
| DIMENSIONS | |
| Crated Width — in (mm) | 48.8 (1,240) |
| Crated Height — in (mm) | 71.8 (1,825) |
| Crated Depth — in (mm) | 58.3 (1,481) |
| Drawing Dimensions | |
| Uncrated Width — in (mm) | A. 46.2 (1,173) |
| Drain to Front Panel — in (mm) | B. 55.3 (1,405) |
| Uncrated Height — in (mm) | C. 66.5 (1,689) |
| Uncrated Depth — in (mm) | D. 55.3 (1,405) |
| Door Opening to Floor — in (mm) | E. 25.4 (646) |
| Center of Drain to Floor — in (mm) | F. 4.2 (107) |
| Center of Water Connections to Floor — in (mm) | G. 59.8 (1,519) |
| Electrical Connection to Floor — in (mm) | H. 62.6 (1,589) |
| Electrical Connection to Left Side — in (mm) | I. 35.7 (906) |
| Cold Water Connection to Left Side — in (mm) | J. 6.4 (162) |
| Hot Water Connection to Left Side — in (mm) | K. 11.1 (282) |
| Leg Height — in (mm) | L. 1.7 (42) |
| Center of Drain to Side — in (mm) | M. 3.5 (88) |
| Distance Between Drains — in (mm) | N. 39.4 (1,000) |
| APPROXIMATE WEIGHT | |
| Uncrated — lb (kg) | 2,255 (1,022.9) |
| Crated — lb (kg) | 2,300 (1,043.3) |
| SPEED | |
| Wash RPM (G) | 35 (0.62) |
| Spin RPM (G) | 847 (360) |
| WATER SPECIFICATIONS | |
| Operating Pressure | 15-87 PSI |
| Inlets Size — in (mm)/Connections | 3/4 (19)/2 |
| Approximate Water Consumption TOTAL — Gal (L)/cycle | 67.9 (257) |
| Drain Valve (Outer Diameter) — in (mm) | 3 (76.2) |

Dimensions are for planning purposes only. See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.

